



Technical Specifications

55423

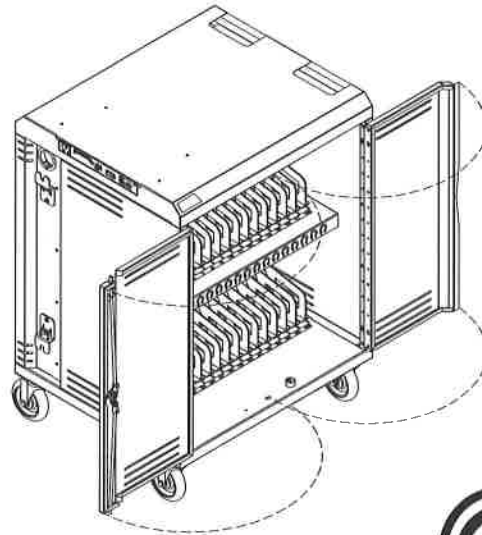

Use the Connect36 Cart to store, transport, and charge up to 36 devices. Three charging options are available. Flexible dividers protect the devices. The overhead wire management aids the wiring integration and allows the charging plugs to hang in front of each device. The cart's compact footprint and top handles provide easy mobility. The economical Connect36 cart is made with heavy-gauge steel for security and powder-coated for a durable, long-lasting finish. Locking doors and panel increase notebook security.

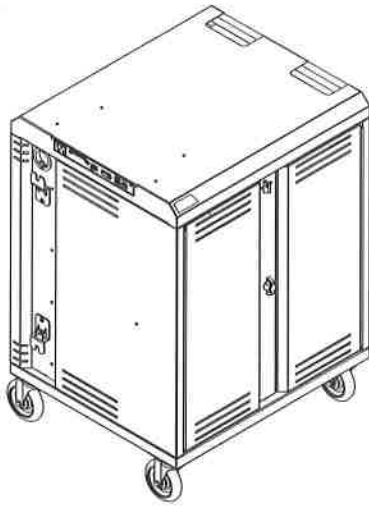

Features and Benefits

- Stores, charges, and transports up to 36 devices (most Chromebooks, tablets*, and notebooks up to 15.6" diagonal)
- 1.3"W x 17.59"D x 13"H storage bay
- Numbered storage bays
- Small cart footprint (29"W x 25"D) saves valuable space
- Durable ABS plastic dividers protect notebooks from scratching (dividers are removable to provide storage space for thicker devices)
- Recessed lock and cord wrap design eliminates damage through doorways
- Heavy gauge student-side doors feature a recessed dual-bolt steel lock with padlock hasp. (Padlock not included).
- Heavy gauge instructor-side panel has a recessed padlock hasp for security. (Padlock not included).
- Devices and students are separated from AC line voltage
- Superior, all-metal overhead cord management system keeps charge cords organized above each bay and make the Connect36 the fastest-to-wire cart in the industry
- Replaceable, IEC (quick-release) 8' nominal 14 AWG, 3-wire power cord and external recessed cord wrap brackets provide easy power access
- Four inboard 5" balloon wheel plate casters (two locking, two non-locking) with metal construction and non-marring rubber provide easy rolling, and quiet transport (rated for 300 lb each)
- Integrated handles in top panel provides control and maneuverability
- Cart ships fully-assembled for quick, simple integration and deployment
- Durable powder coated steel chassis provides a long-lasting finish
- ETL recognized (certified to UL 60950-1) in the US and Canada for the cart and electrical system
- Warranted to be free of all defects in materials and workmanship for 10 years, electrical system 2 years
- Designed and assembled in Chippewa Falls, WI, USA
- PowerProdigy™ timer that senses current from both power units and distributes power (up to 10A) to the least-charged devices first (where charging is needed most) ***For most power adapters up to 65W**
- eLogix™ timer provides cycling power to both power units (non current-sensing) ***For most power adapters up to 65W**
- Power switch provides continuous power to both power units (non current-sensing) ***For most power adapters up to 35W**
- Cart is available prewired with USB-C chargers
- Horizontally adjustable, (125V~/12A, 60Hz) universal power units work with most inline adapters (36 outlets)
- External power switch provides easy-access for safe power connection / disconnection
- External LED illumination on timers indicate charge status while doors are closed
- Large wiring trays on power-side provide convenient power adapter and wiring storage
- Ventilated doors and side panels keep devices and chargers cool, preventing overheating, and extending device life

*Accessory power plug may be needed
revised 9/19/22

Inline outlets
(Use with inline charge adapters)



55423-DBQ - PowerProdigy™ Timer
55423-DBR - Power Switch
55423-DBT - eLogix™ Timer

Rotated outlets
(Use with wall or inline charge adapters)



55423-DBV - PowerProdigy™ Timer
55423-DBW - Power Switch
55423-DBX - eLogix™ Timer

55423-DBO - Storage cart only-no power
(for storage use only, or for customer-supplied USB power)

55423-USBC - Storage cart with USB-C charging / power switch (prewired)

Color Options

Warm Gray



Black
(top panel)

Construction

- 16-gauge top cover
- 20-gauge doors, side panels, power-side panel, and base
- All metal components are finished with a scratch-resistant powder coat epoxy
- ABS plastic dividers
- This cart is factory-assembled, packaged, and shipped on its own skid


Specifications

Capacity	36 devices. (Most Chromebooks, tablets*, or notebooks) <i>*Accessory power plug may be needed</i>	
Storage bays (nominal)	1.3"W [3.3 cm] x 17.59"D [44.7 cm] x 13"H [33 cm]	
Electrical	• Two 18-outlet power units • 125V~/12A, 60Hz • 15-amp breaker • IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire power cord	• Locking power-side panel isolates and separates electrical line voltage from students • ETL recognized (certified to 60950-1)
Charging options (See p.4 for specs)	! Note: The customer should be aware of the amp draw of the devices used with this cart-especially when maxing out the storage and charging capacity. Exceeding 15 amps will trip the circuit breaker. Please consult the owners manual of your specific device for power consumption information.	
5" Balloon Wheels	Weight capacity 300 lb [136.2 kg] each (two locking, two non-locking)	
Certifications / Compliance	• ETL recognized • SCS Indoor Advantage Certified	• Meets or exceeds applicable ANSI-BIFMA test standards
Unit weight (nominal)	132 lb [60 kg]	
Shipping weight (nominal)	180 lb [81.7 kg]	

Specifications subject to change without notice

Note: Do not place items weighing more than 50 lb [22.7 kg] on the top surface. Please remove or secure items before moving cart.

Numbered storage bays

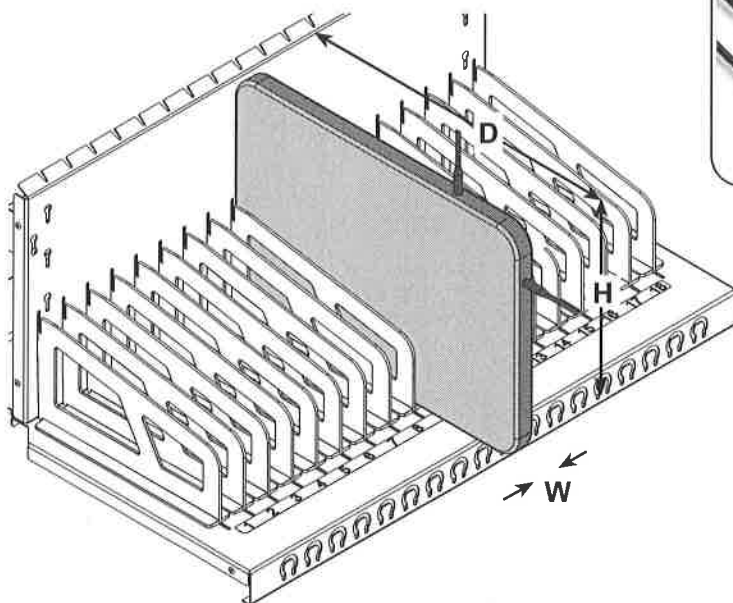

Devices must be placed in the bays with the charge plug on one of the two exposed edges shown.

USB-C Charger
(USB-C prewired cart only)




Specifications:


- Model: HA712
- Input: 100-240V ~ 50/60Hz 1.5A
- Output (USB-C): 5V~3A 9V~3A 12V~3A 15V~3A 20V~3.25A
- Dimensions: 1.97" x 1.97" x 1.10" (50mm x 50mm x 28mm)
- Net Weight: 3.42 oz [97 g]

5" Balloon Wheel

Note: (2) locking, and (2) non-locking casters are included on each cart.

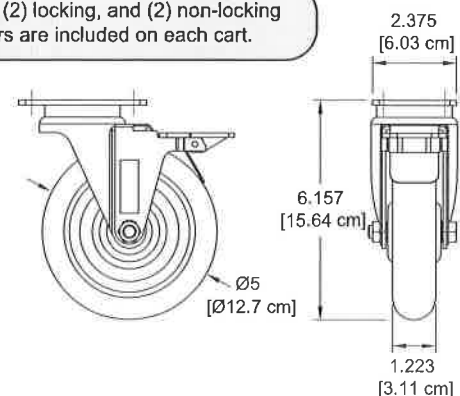

Device-side locking doors

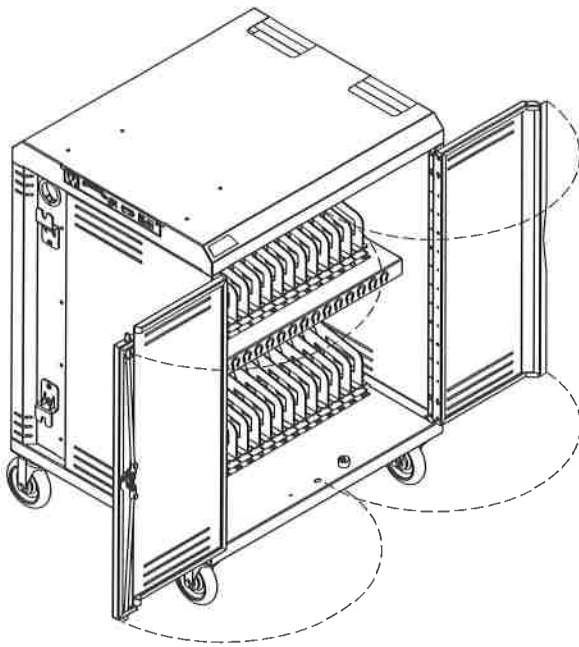


Hasp for padlock

Padlock*
(not included)




*Padlocks with a shackle diameter
up to 11/32" [9mm] can be used

Device-side doors

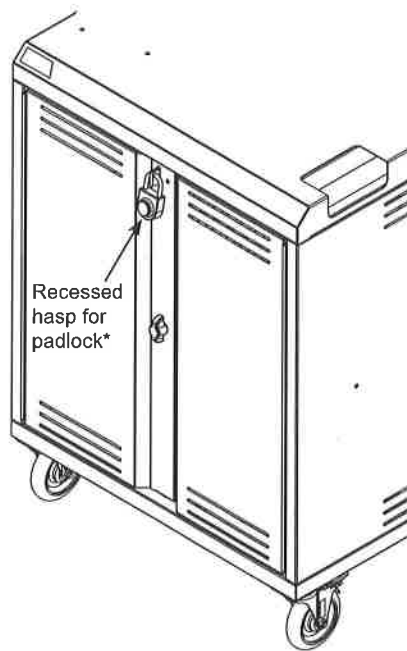

Power-side locking access panel

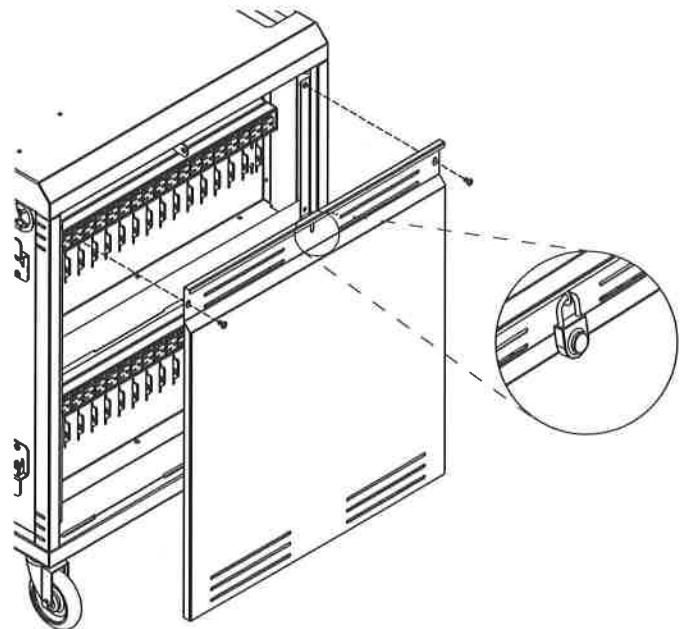

Electrical Options

Connect36™ Electrical comparison			
PowerProdigy™ Timer	eLogix™ Timer	Power Switch	
✓		✓	External auxiliary outlet
✓	✓	✓	Internal auxiliary outlet
✓	✓	✓	External on/off switch
✓			Load-sensing technology
	✓		2 bank
✓		✓	4 bank
✓	✓		Max charging capacity: 5.760 watts (on Connect36, most power adapters up to 65W)
		✓	Max charging capacity: 1.440 watts (on Connect36, most power adapters up to 35W)
✓	✓		LED lights indicate charging status
✓	✓	✓	ETL certified to 60950-1




Total watts required
per cart (estimated)

=




Number of
devices

X



Charger
wattage

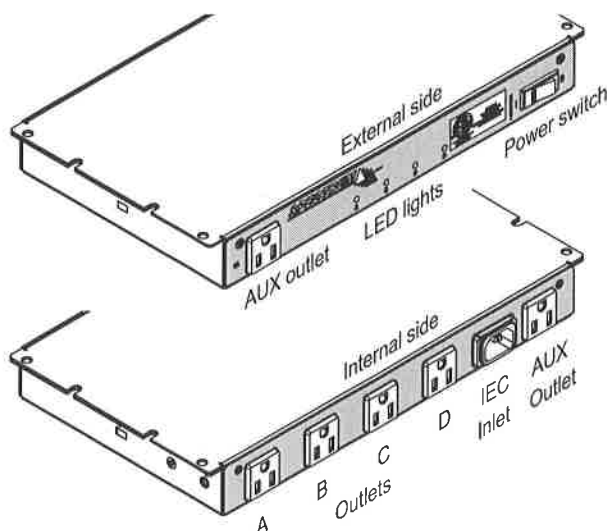


PowerProdigy™ Timer (Q)

Use with higher amp-draw devices.
Maximum charging capacity: 5,760 watts.

- Smart charging senses current and distributes power to the power units requiring it most
- Four timed power unit-dedicated outlets (labeled A, B, C, D) controlled by logic board
- Four green LED lights indicate charging activity status of each power unit
- Two auxiliary outlets (1 external, 1 internal)
- ETL recognized (certified to 60950-1)

Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Cycling interval:	15 minutes
Cycling outlets:	4 timed (A, B, C, D) up to 10A
Auxiliary outlets:	1A each (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

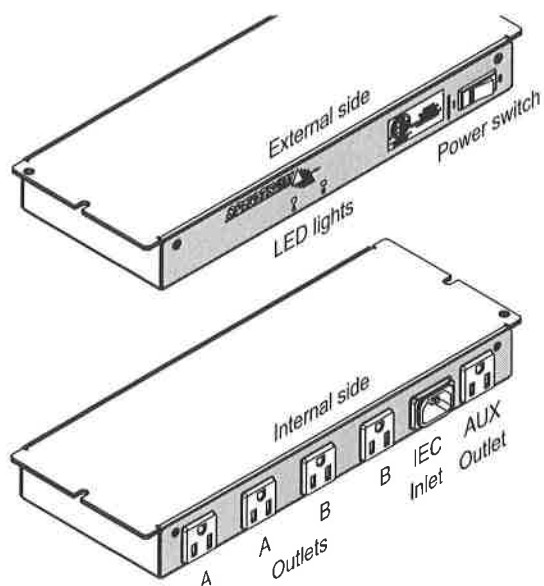


eLogix™ Timer (T)

The eLogix™ timer charges one half of the devices for 15 minutes, then charges the second half of the devices for another 15 minutes. This cycling occurs automatically and is not adjustable. Maximum charging capacity: 2,880 watts.

- Two timed power-unit dedicated outlets (labeled A, B) (up to 10A power output)
- Two green LED lights indicate charging activity status
- One auxiliary outlet (external)
- ETL recognized (certified to 60950-1)

Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Cycling interval:	15 minutes
Cycling outlets:	4 timed (A, B) up to 10A
Auxiliary outlet:	1A (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

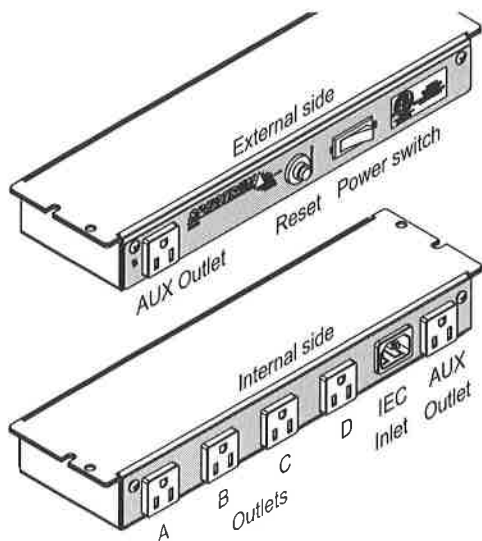


Power Switch (R)

The Power Switch provides continuous power to **all** power units. Use with lower amp-draw devices. Maximum charging capacity: 1,440 watts.

- Four continuous power-unit dedicated outlets (labeled A, B, C, D)
- Two auxiliary outlets (1 external, 1 internal)
- ETL recognized (certified to 60950-1)

Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Outlets:	4 timed (A, B, C, D) up to 10A
Auxiliary outlets:	1A each (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

Connect36 Cart

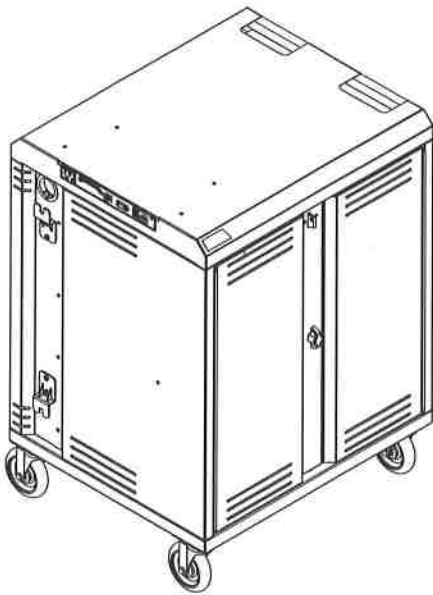

Power-side panel with hasp

